

Sight Glass Level Gauge CL 300

Type 700.4601(reflex) / 700.4602 (transparent)

Applications

Direct reading liquid level indicator with glass tube for out-gassing media up to CL 300 (depends on glass type).

Special Features

- Reflex, Transparent
- Connection top-bottom pivoted
- Gauge heads 760.51/52/53

General Data

Visible length SL	< GL
Process connection	flange, nipple
Material glass plates acc. To DIN7081	Borosilicate
Material media wetted parts	CS, SS

Depending on delivery situation material can vary.
Types with special materials e.g. Hastelloy, Monel etc. are available.

Design Data


Derating depends on temperature and window size.

Further Data

Process connection see Connections

Accessories

Glass protection etc.	see Accessories
Frosts protection	see Accessories
Illumination	see Accessories
Scale	see Accessories
Heating	see Accessories

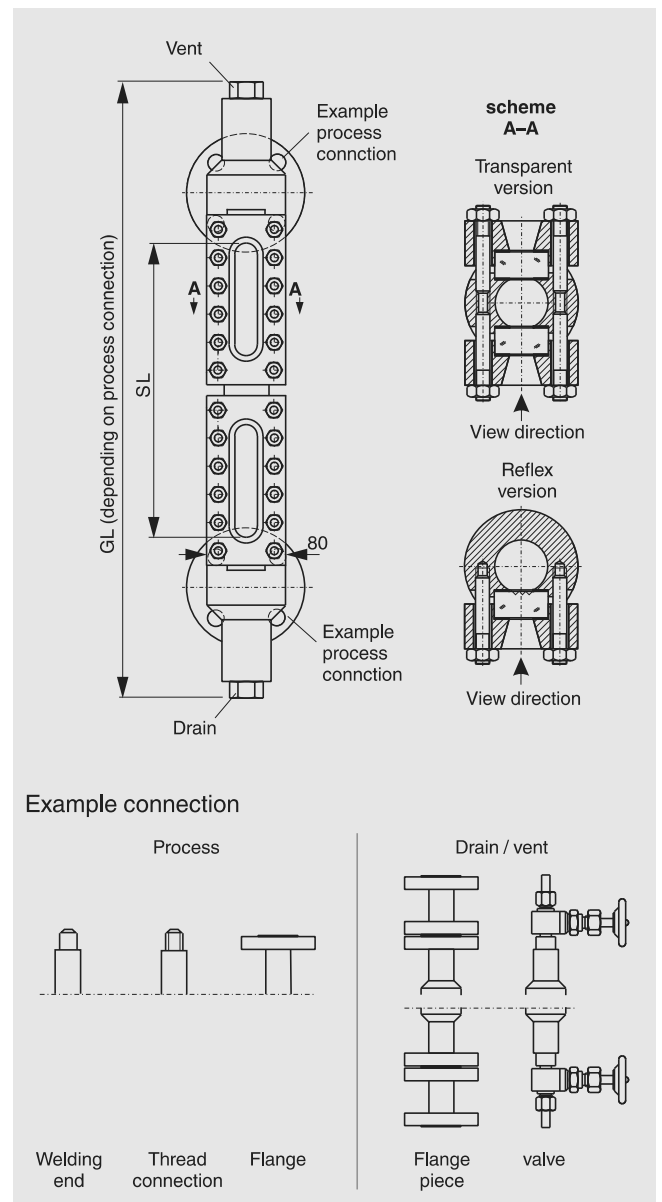

CS (= carbonsteel) and SS (= stainless steel type 316SS) are materials suitable for Pressure Vessels according to EN or ASME.