

# Sight Flow Indicators *with Spinner*

with *flanged* connection acc. to **DIN - PN 16 / 25 / 40**



**Cast Iron** GG 25 ( EN-GJL-250 ) max 16 bar  
**Cast Steel** GS-C 25 ( 1.0619 / GP240GH )  
**Stainless Steel WN** 1.4408

**Bauform 880-RK**  
**Bauform 880-RP**

## Application:

The flow indicators are used for optical control of fluids and gases, for horizontal and vertical pipe lines.

## Installation:

Optional. Take care of flow direction

## Operating conditions:

Working pressure: max. 16 / 25 / 40 bar  
 Working temperature: max. 120°C or 260°C

## Certificate: ( Option )


Acc. to EN 10204-2.2 or 3.1

## Options:

- Heating jacket
- Sight glass light - fitting
- ANSI-flanges
- F lap

## Materials:

Body	<b>GG 25</b>	<b>GS-C 25</b>	<b>1.4408</b>
Covers	GG 25 / S235JRG2	GS-C 25 / S235JRG2	1.4408 / 1.4301
Screws	4.6 / 5.6 gal.		A4-70
Sight glass	Borosilicate glass DIN 7080 Soda-lime glass DIN 8902 ( 150°C )		
Gaskets	Graphite, ( or other materials )		
Spinner	Plastic up to 120°C; <b>Bauform 880-RK</b> PTFE up to 260°C; <b>Bauform 880-RP</b>		

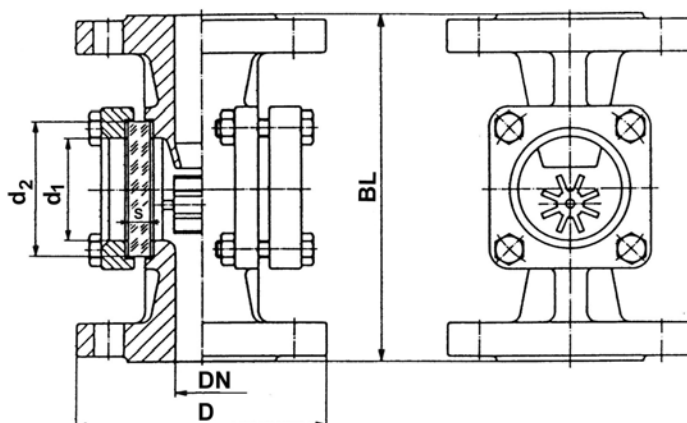

## Ordering example:

Sight Flow Indicators with Spinner  
 Bauform 880-RP,  
 GS-C 25, PTFE-Spinner  
 Borosilicate glass DIN 7080  
 DN 50, PN 16



## Dimensions:

DN	D	BL	d <sub>1</sub>	d <sub>2</sub>	Glass plate		
					S		
					PN 16	PN 25	PN 40
15	95	130	32	45	10	10	
20	105	150	32	45	10	10	
25	115	160	48	63	10	12	15
32	140 180		48	63***	10	12	15
40	150	200	65	80	12	15	20
50	165	230 80	100		15	20	25
65	185	290 80	100		15	20	25
80	200	310 100	125		20	25	30
100	220(235) *	350 125	150		25	30	35
125	250(270) *	400 150	175		25	30	a.A.
150	285(300) *	480 175	200		30 **	35	a.A.
200	340(360/375)*	600 175	200		30 **	35	a.A.
250	405(425/450)*	730 175	200		30 **	35	a.A.

\* D in ( ) acc. to PN 25 / PN 40

\*\* 16 bar only with borosilicate glass possible

\*\*\* by GG25 glass plate Ø 80x12

Modifications reserved



AVEMAR CZECH s.r.o., Lihovarská 10, 716 03 Ostrava - Radvanice  
 Tel.: +420 596 232 996, 596 232 997, Fax: +420 596 232 998  
 E-mail: avemar@avemar.cz, web: www.avemar.cz