



Pointer D / Pointer L

Max. pressure 10 bar, 70 lbs

Model	D-10 / D-70 L-10 / L-70	
Material	Stainless steel 316L (1.4404)	
Pipe	60.3 x 2 mm	
Pressure	Max. 10 bar / 70 lbs	
Temperature	Max. 160 °C	
C. to C.	Max. 5500 mm (for longer C. to C. see pointer D-16)	
Indication rail	Polycarbonate (max. temp. 105 °C, temporary 120 °C) Aluminium/ Perspex Stainless steel	
Process connection	DIN DN 15 – DN 32 / PN 16 ANSI ½" – 1¼" 150# RF Weld or thread (Male/ Female) ½" – 1" DN 40 – DN 50 and ANSI 1.1/2" – 2" on 1" pipe	B = 75 mm B = 85 mm B = 75 mm B = 130 mm
Drain	¼", ½" or ¾" plug BSP or NPT ¼" or ½" with ballvalve	
Drain gasket	None EPDM, NBR, FPM	
Vent	¼", ½" or ¾" plug BSP or NPT G 2" stop None	
Float	From density min. 380 kg/m ³	
Drain length	Density min. 940 kg/m ³ Density min. 830 kg/m ³ Density min. 720 kg/m ³ Density min. 660 kg/m ³	A = 200 mm (*) A = 235 mm (*) A = 285 mm (*) A = 340 mm (*)
Extra support	C. to C. > 3 meter for offshore C. to C. > 4 meter for onshore	
Pointers	High & Low in stainless steel	
Marking	Tag plate acc. to standard lay-out in stainless steel PED marking till mod. III std.	
Certificates	Material EN 10204 3.1 + drawing Pressure test acc. HADRO standard GL, LRS or BV certificate	
Special	Electrical tracing	

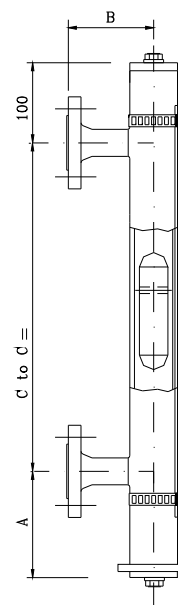

Pointer D

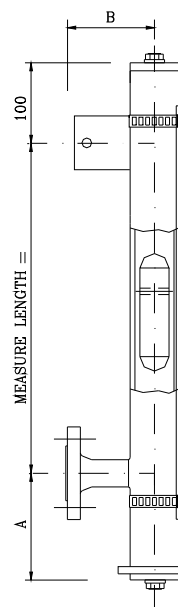

Pointer L

(*) special (shorter) drain length available on request.